


APA BUILD A BETTER HOME ROOF DETAIL:
**CLOSED MITERED VALLEY WITH
INTERWOVEN METAL VALLEY FLASHING**

Valley flashing pieces should extend approximately 9"
beyond both sides of valley centerline

Ice dam protection
membrane or felt
underlayment (36")

APA Rated
Sheathing

Individual soft metal
valley flashing—
(extend 2" upslope from
tile to be overlaid, extend
downslope 1/2" short of
overlying tile)

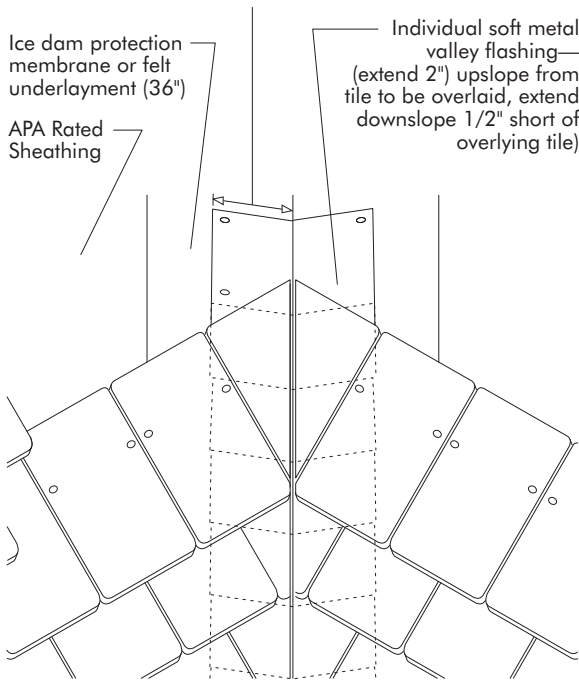

Note: Field underlayment not shown for clarity